

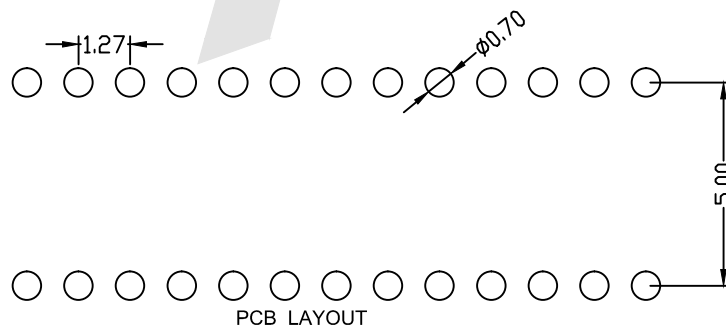



HSF

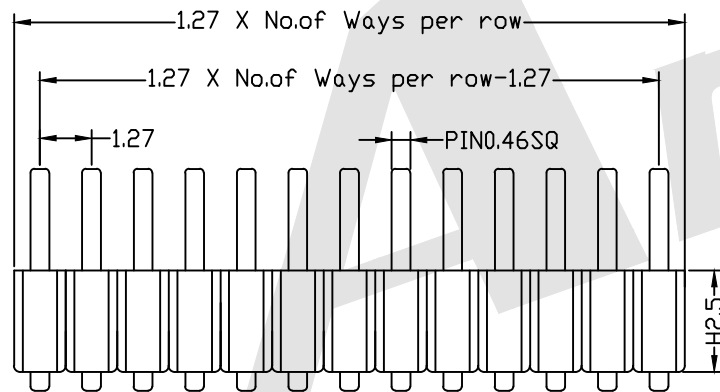

ROHS

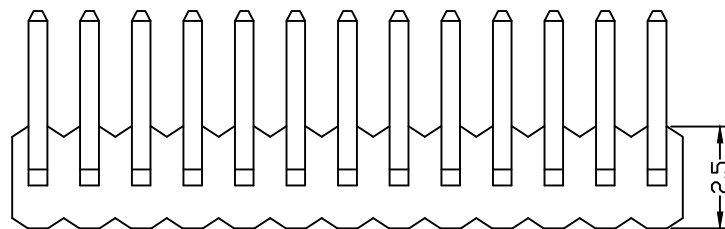

PCB LAYOUT



SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHCU02 - ① - ② - ③ - ④ - ⑤ - ⑥ - ⑦

① Series No:

② No. of Contacts
01 To 50

③ Contact Plating:

G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"

SN: Tin

④ Connector Type
S: Single

⑤ Pin Length:

A:0260=2.60mm

D:0200=2.00mm

W:0500=5.00mm

Please mark the desired length in the A/D/W

⑥ Insulator Material

B:PA6T

C:LCP

E:PA9T

⑦ Packing:

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

Standard IE P/N :

PHCU02-10-G0-D-0260-0200-0500-B-B

A	D	W
2.6	2.00	5.0

Optional

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

1.27mm Pin Header Single Row Angle C Type

DRAWING NO: PHCU02-XXS-0260-0200-0500-XX

PRODUCT NO: PHCU02-XXS-0260-0200-0500-XX

REV	DESCRIPTION	DATE
1	Increase packing method and material	2016/10/25